


Product Data - MX UVF Acrylic



Physical & Mechanical Properties*

Property	Typical Value	Method
OPTICAL		
% of Light Transmission (0.100" - 0.197")	92%	ASTM D 1003
Haze	2.0	ASTM D 542
PHYSICAL - MECHANICAL		
Specific Gravity	1.18	ASTM D 792
Tensile Strength	9600 lb/in ²	ASTM D 638
Elongation at Rupture (%)	4.5 %	ASTM D 638
Modulus of Elasticity	425000 lb/in ²	ASTM D 798
Flexural Strength	15,000 a 16,000	ASTM D 798
Izod Impact Strength	0.40 - 0.50 ft lb/in	ASTM D 256
Rockwell Hardness	M 90 - 100	ASTM D 785
THERMAL		
Maximum recommended continuous service temp	80 °C	
Deflection Temperature Under Load (264 psi) (°C)	91 °C	ASTM D 648
Coefficient of thermal expansion	4 x 10 ⁻⁵ in/in F	ASTM D 696
PERFORMANCE		
Water Absorption (24 hrs)	0.3%	
% of Light Transmission at UV region	2.0% Maximum	

All Values are referred to .118" UV-F acrylic sheets. These values are typical and should not be taken as specifications. UV-F blocks atleast 98% of the UV radiation causing deterioration.

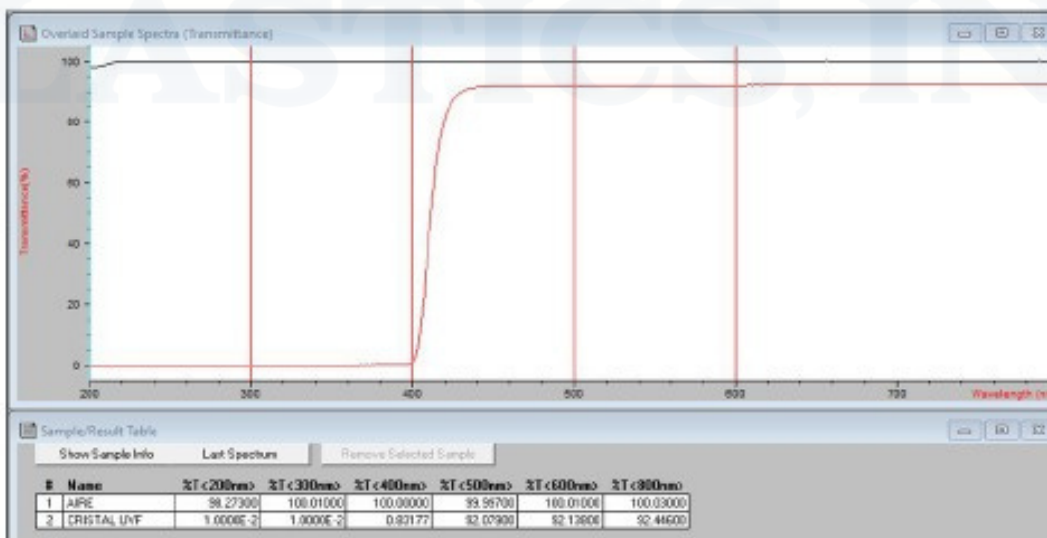

These data are presented only as typical properties of the base resins which, to our best knowledge, are true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guaranty or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise. All risks of such use are assumed by the user. Furthermore, nothing contained herein shall be construed as an inducement or recommendation to use any process or to manufacture or use any product in conflict with existing or future patents.